


Palette

(Plank Series)




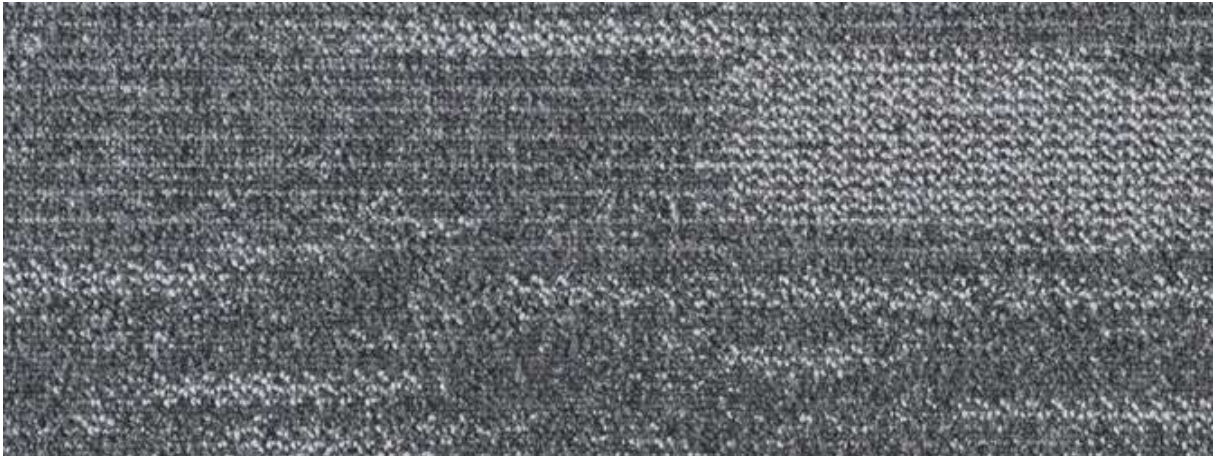

PA 3311 KELABU



PA 3320 BIRU

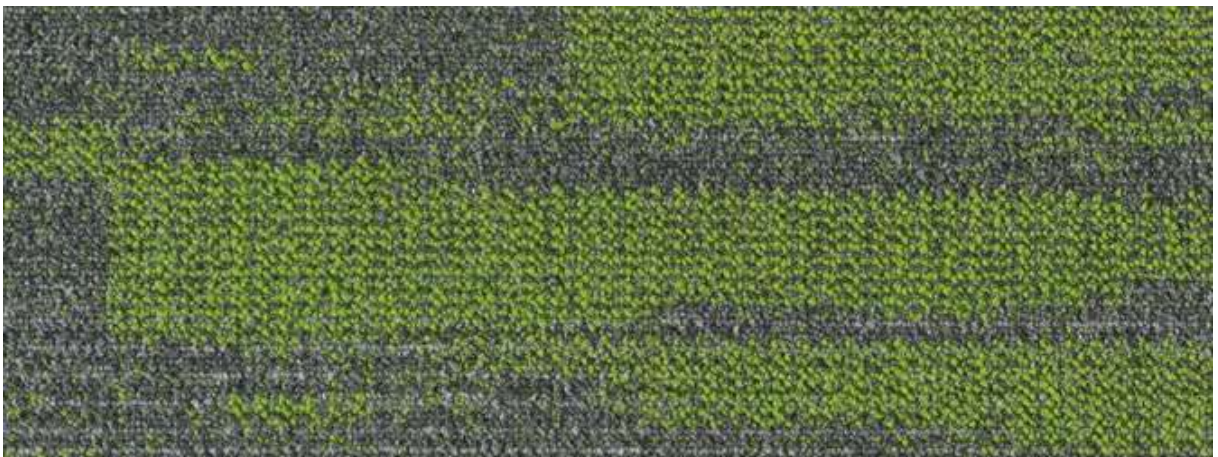


PA 3336 LJO



PA 3362 KUNING




PA 3386 ORANYE

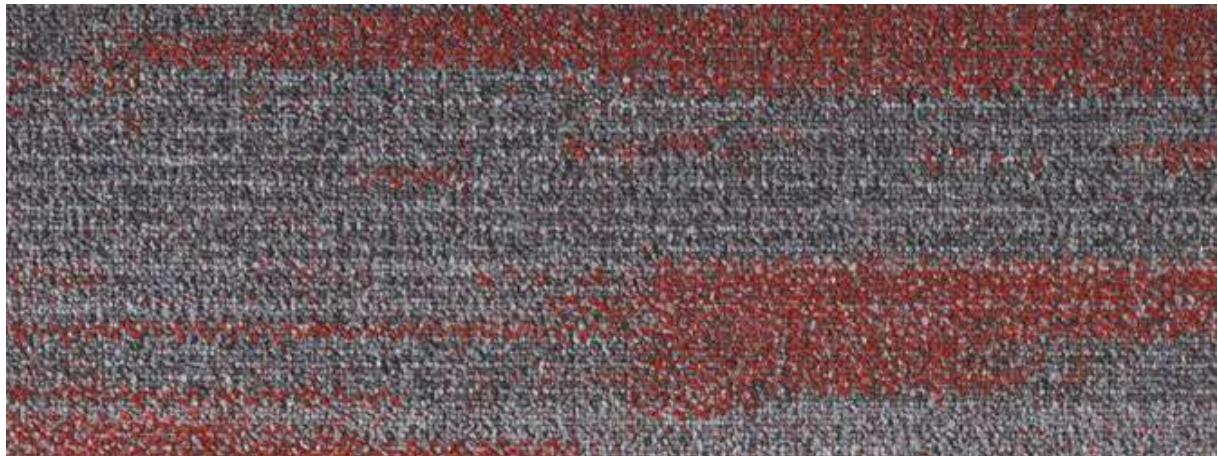

PA 3358 ABANG



PA 3311

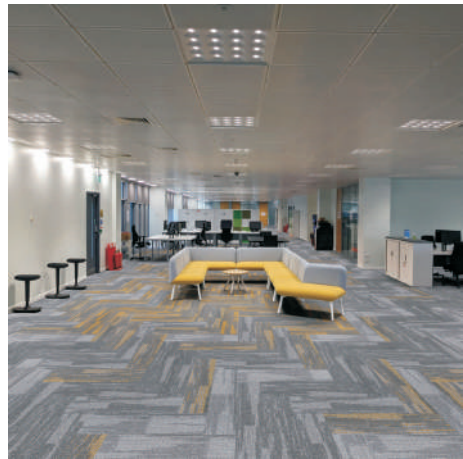

PA 3311 & PA 3362



PA 3311 & PA 3320





PA 3311 & PA 3386





PA 3311 & PA 3336





PA 3311 & PA 3358

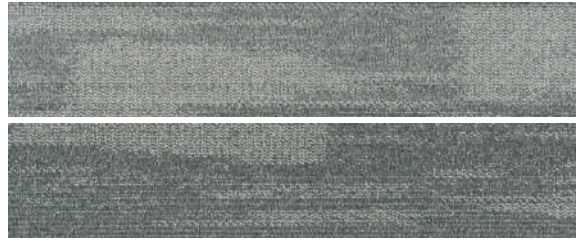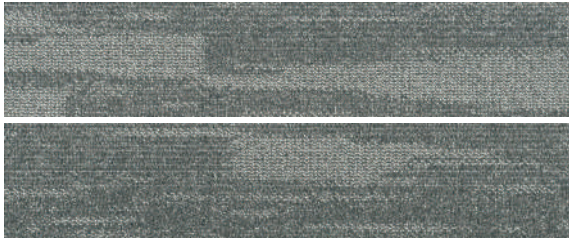



PA 3311

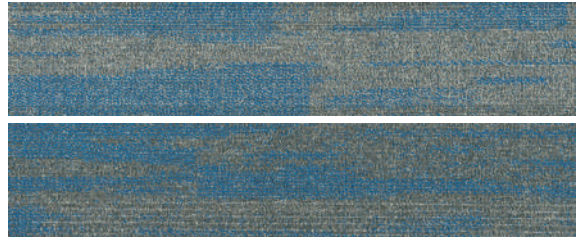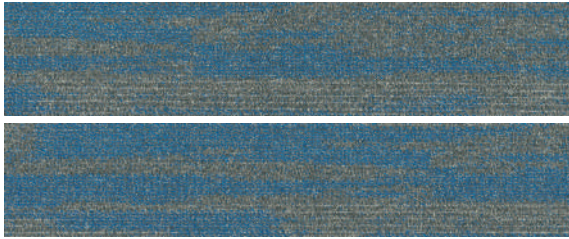



PA 3320

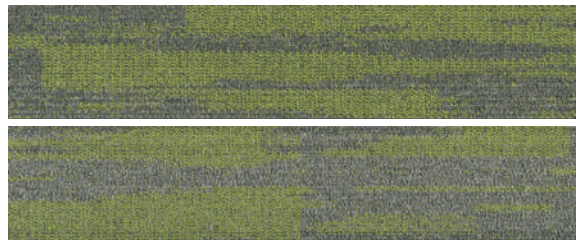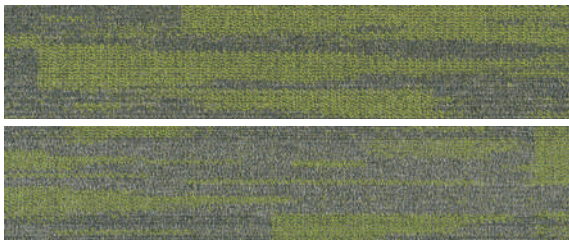



PA 3336

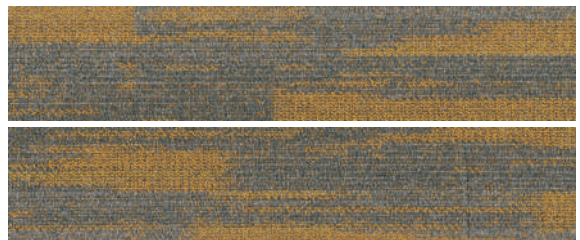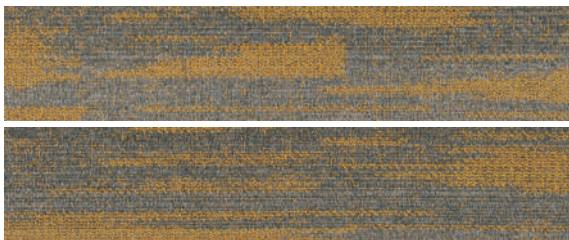

PA 3362

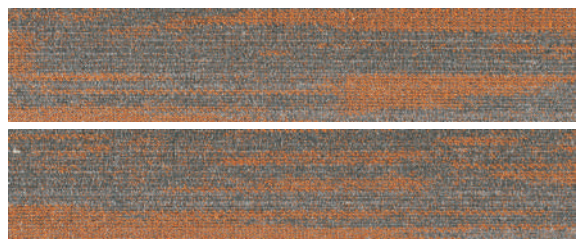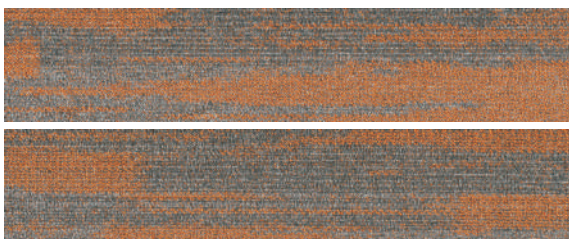

PA 3386

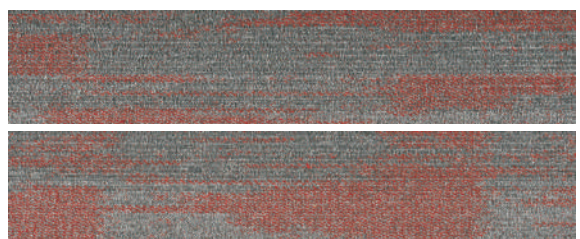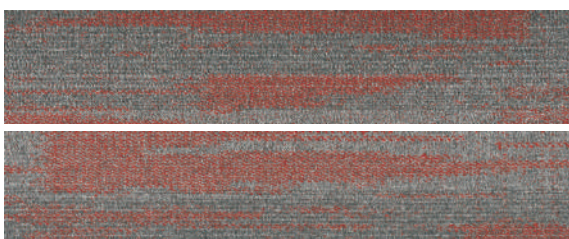

PA 3358

Technical Specification :

Product Identification :.....	PALETTE
Constructional Process :.....	Multi-Level Loop
Manufacturing Method :.....	Tufted
Colour System :.....	Solution Dyed Yarn
Yarn Weight :.....	16 oz/sq.yd (550 gsm)
Pile Height :.....	3.5-4.5 mm
Yarn Content :.....	100% Polypropylene
Total Height :.....	6.0 mm
Gauge :.....	1/12"
Primary Backing :.....	Non-Woven Synthetic
Tile Backing :.....	Bitumen+110g Non-Woven Fabric
Tile Size :.....	250 x 1000 mm
Packing :.....	24 Pieces Per Carton (6 m ²)

Performance Characteristics :

- Solution dyed fibres enable colour retention throughout the useful life of the carpet.
- Polypropylene fibres possess good colourfastness properties.
- The polypropylene yarn are antistatic and can therefore be aptly deployed in work environment where antistatic properties are required.
- The polypropylene fibres are antimicrobial and antibacterial which inhibit the growth of microorganisms such as bacteria and fungi.
- The inherent polypropylene resistance to moisture absorption permits spills and stains to be quickly removed.

Warranty :..... 1 Year Limited Warranty
Usage :..... Commercial Applications

Note : Colour from another production lot is subject to dye lot variation.

Recommended Installation:

