

## **Recommended Installation Methods**




Basketweave Ashlar Herringbone





**SPARKS PLANK** 

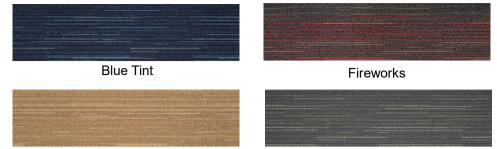

Nutmeg

Space Grey

## **Specifications** Construction

Yarn Pile Weight Total Thickness Backing Tile Size Packing

## 1/12" Tufted Mult-Level Pattern Loop Pile Solution Dyed Nylon 22 oz/yd2 7 – 7.50mm ComfortBac 250 x 1000mm 20 pcs per box (5m2)

## Performace

Radient Panel Smoke Density ASTM E662 Less than 450 Static Propensity AATCC 134 Less than 3.5KV Colour Fastness to Light AATCC 16E ≥4 **Dimension Stability** AACHEN ≤0.2% Foot Traffic RecommendationHeavy Commercial Antimicrobial Health Guard Certificates Singapore Green Label Certification Singapore Green Building Product Certification

ASTM E 648 Class 1

(4 ticks)