

TOP ATTRACTION

CARPET TILES

100% SOLUTION DYED NYLON

ENERGY INFUSED,
MINIMALISTIC VIBRANCE

1370 GAINSBORO BEIGE
1376 RUSSET ALLOY



“

Designed To Be Stain Resistant.
Enhancing, Creating & Offering A Clean &
Focused Environment.

U 1310 CHROMA GREY | 1314 VERMILION VEIN



In Tile Size: 50 cm x 50 cm



Quarter-Turn

“ COLOUR CO-ORDINATED & DESIGN COMPATIBLE WITH TOP BRASS & TOP CALIBRE


TOP ATTRACTION | 1330 STERLING ASH
🔄 TOP BRASS | 1430 STYGIAN GREY





1330 STERLING ASH ⓘ

In Tile Size: 50 cm x 50 cm

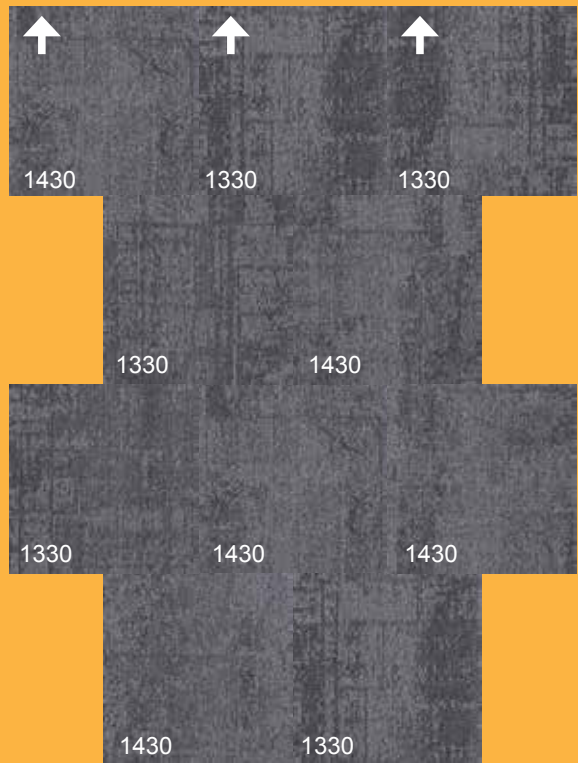

Brick

1310 CHROMA GREY | 1312 AZUREAN BLUE



Quarter-Turn



“

Made From 100% Solution-Dyed Nylon,
For Outstanding Durability And Colorfastness.

Engineered For Safety & Protection,
Possessing Both Flame-Retardant & Anti-Static
Properties.

TOP ATTRACTION

SWATCHES

In Tile size 50cm x 50cm
Tile pattern are packed randomly per box.



1310 CHROMA GREY



1330 STERLING ASH



1340 ONYX CINDER



1312 AZUREAN BLUE



1313 PERIWINKLE FOIL



1314 VERMILION VEIN



1315 BISMUTH GREEN



1370 GAINSBORO BEIGE



1376 RUSSET ALLOY



1377 GAMBOGE YELLOW



1310 CHROMA GREY
1313 PERIWINKLE FOIL



Monolithic

TOP ATTRACTION Specifications

Construction	1/12" Multi-Level Loop Pattern
Yarn Composition	100% Solution Dyed Nylon
Tufted Pile Weight	Ca. 678 g/m ² (20 oz/yd ²) (+/- 10%)
Total Weight	Ca. 4000 g/m ² (112 oz/yd ²) (+/- 10%)
Pile Height	Ca. 4 mm (+/- 0.5 mm)
Total Height	Ca. 6 mm (+/- 0.5 mm)
Density (APYD)	4,572 ozs/yd ³
Tuft Density	143,866 stitches/m ²
Stitch Rate	51.2 per 10 cm
Backing	EcoAce Polyolefin Backing
Tile Size	50 cm x 50 cm
Packing	20 pcs per box (5 m ²)

Performance

(as tested by ITTS Inc. USA)

Stain Resistance	9 (AATCC-175-2003)
Static Control	Pass - Max. 4 kV (AATCC 134-1996)
Tuft Bind	Pass - 6.8 lbs (ASTM-D-1335)
Dimensional Stability	Pass - Max. 2% change (AACHEN)
Indoor Air Quality (V.O.C.)	Pass - No VOC Detected (ASTM-D5116-10)
Impact Sound Insulation	ΔLw: 28 dB (ISO 10140)
Sound Absorption	αw = 0.25 (H) (ISO 354) Hz 125 250 500 1000 2000 4000 αs 0.00 0.05 0.30 0.20 0.20 0.25
Flammability	
- Radiant Panel	Pass - Class I (ASTM-E-648-06)
- Pill Test	Pass - 8 (ASTM-D-2859-96)
Colourfastness	
- to light	Excellent - 5 (AATCC-16E)
- to wet & dry crocking	Excellent - 5 (AATCC-16S)
- to ozone	3 (AATCC-129)

Warranties

15 Year Carpet Wear Warranty

Lifetime Anti-shock Carpet Warranty

Ideal for Heavy Commercial Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles. Due to dye lot variations, actual colour may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

Environment

The design and production of Top Attraction Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

As a responsible manufacturer and to minimize our carbon footprint, a majority of our excess production materials are recycled in-house resulting in a minimum of 10% recycled content in our tile backing. Top Attraction Tile does not contain any PVC in its manufactured materials and packaging.

Top Attraction Tile is an environmentally friendly "green" carpet.

Installation Method



Monolithic



Quarter-Turn



Ashlar



Brick

Declare.



TOPATTRACTION
CARPET TILE